


THE NEW VALUE FRONTIER



KC130GT

HIGH EFFICIENCY
MULTICRYSTAL
PHOTOVOLTAIC
MODULE

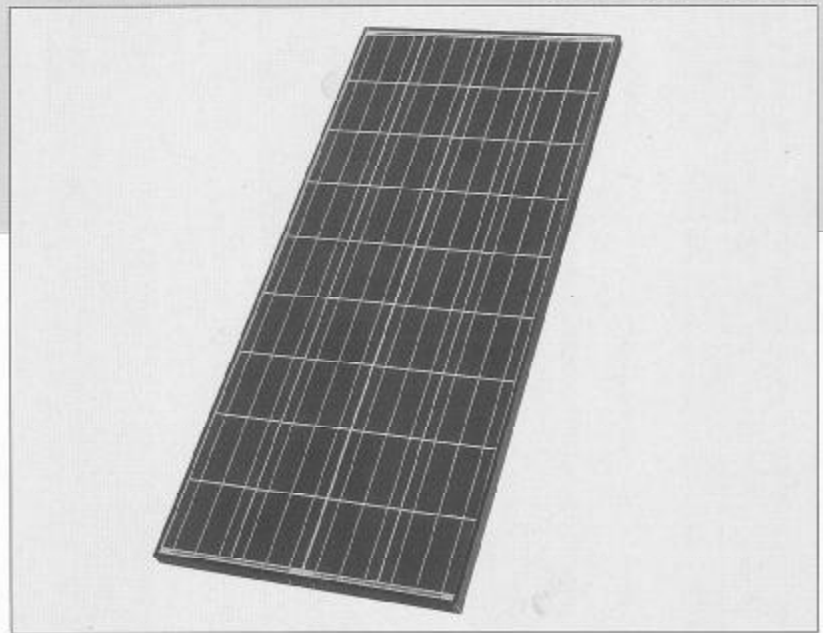

HIGHLIGHTS OF KYOCERA PHOTOVOLTAIC MODULES

Kyocera's advanced cell processing technology and automated production facilities produce a highly efficient multicrystal photovoltaic module.

The conversion efficiency of the Kyocera solar cell is over 16%.

These cells are encapsulated between a tempered glass cover and a pottant with back sheet to provide efficient protection from the severest environmental conditions.

The entire laminate is installed in an anodized aluminum frame to provide structural strength and ease of installation. Equipped with plug-in connectors.

APPLICATIONS

KC130GT is ideal for grid tie system applications.

- Residential roof top systems
- Large commercial grid tie systems
- Water Pumping systems
- High Voltage stand alone systems

QUALIFICATIONS

- **MODULE**
UL1703 certified

- **FACTORY**
ISO9001 and ISO14001

PERFORMANCE WARRANTY

1 year limited warranty on material and workmanship

25 year[†] limited warranty on power output

SPECIFICATIONS

■ Electrical Specifications

MODEL	KC130GT
Maximum Power	130Watts
Tolerance	+10% / -5%
Maximum Power Voltage	17.6Volts
Maximum Power Current	7.39Amps
Open Circuit Voltage	21.9Volts
Short-Circuit Current	8.02Amps
Length	1425mm (56.1in.)
Width	652mm (25.7in.)
Depth	36mm (1.4in.)
Weight	12.2kg (26.8lbs.)

■ Thermal parameters


Nominal Operating Cell Temperature	47°C
Isc Current temperature coefficient	(3.18 × 10 ⁻³) A/°C
Voc Voltage temperature coefficient	(-8.21 × 10 ⁻²) V/°C

Note: The electrical specifications are under test conditions of Irradiance of 1kw/m², Spectrum of 1.5 air mass and cell temperature of 25°C

Kyocera reserves the right to modify these specifications without notice.

■ Physical Specifications


(Unit: mm)

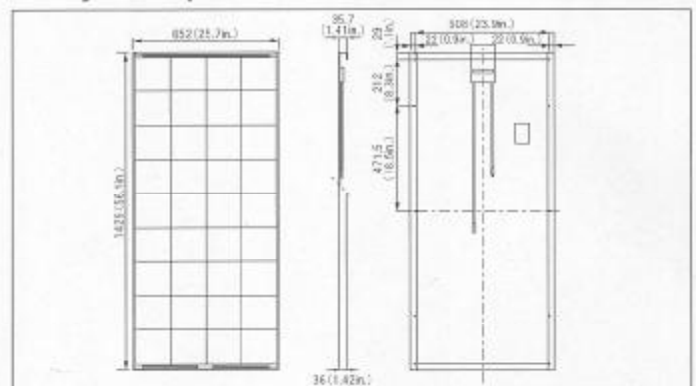


†(Long term output warranty shall guarantee that loss of output is not more than 10% of the minimum warranty value of the product specifications within 12 years and is not more than 20% within 25 years after the purchase of the product by customer. The output values shall be those measured under Kyocera standard measurement conditions. Regarding the warranty conditions in

ELECTRICAL CHARACTERISTICS

Current-Voltage characteristics of Photovoltaic Module KC130GT at various cell temperatures

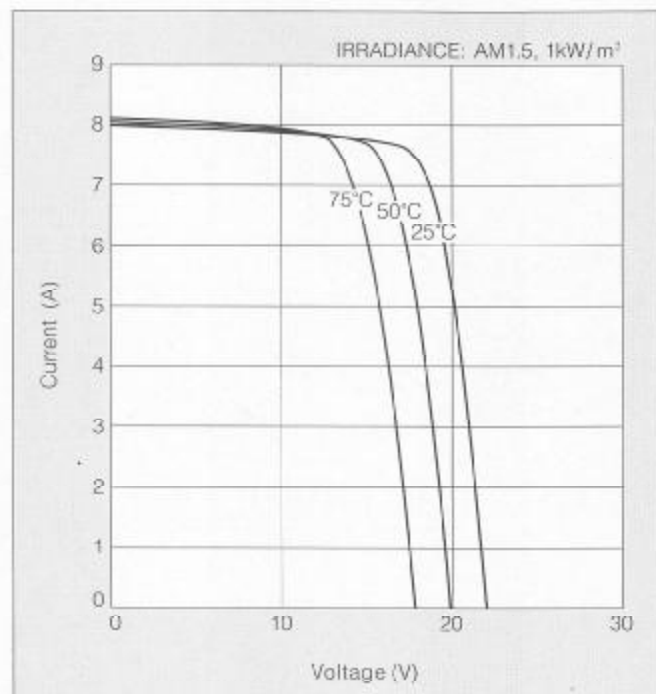

Current-Voltage characteristics of Photovoltaic Module KC130GT at various irradiance levels

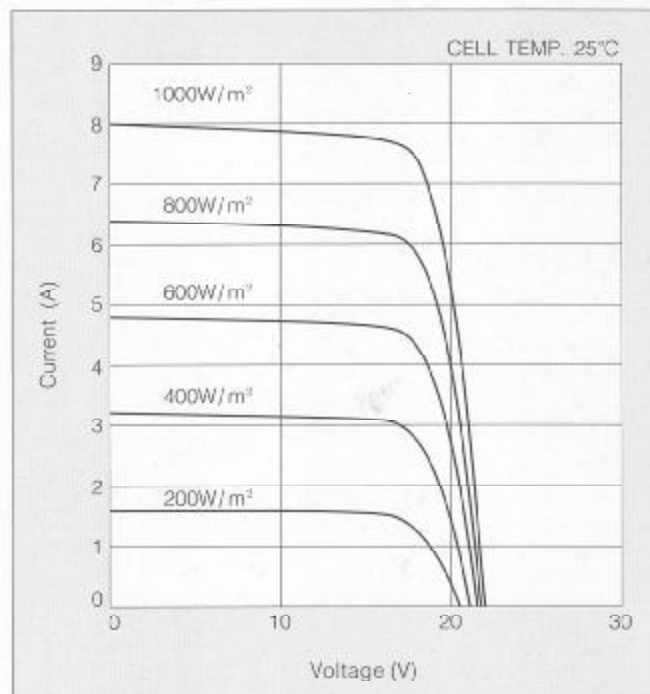

QUALITY ASSURANCE

Kyocera multicrystal photovoltaic modules have passed the following tests.

- Thermal cycling test
- Thermal shock test
- Thermal/ Freezing and high humidity cycling test
- Electrical isolation test
- Hail impact test
- Mechanical, wind and twist loading test
- Salt mist test
- Light and water-exposure test
- Field exposure test

Please contact our office to obtain details without hesitation.



KYOCERA Corporation

■ KYOCERA Corporation Headquarters

CORPORATE SOLAR ENERGY DIVISION
6 Takeda Tobadono-cho
Fushimi-ku, Kyoto
612-8501, Japan
TEL:(81)75-604-3476 FAX:(81)75-604-3475
<http://www.kyocera.com>

● KYOCERA Solar, Inc.

7812 East Acoma Drive
Scottsdale, AZ 85260, USA
TEL:(1)480-948-8003 or (800)223-9580 FAX:(1)480-483-6431
<http://www.kyocerasolar.com>

● KYOCERA Solar do Brasil Ltda.

Energia Renovavel LTDA,
Rua Mauricio da Costa Faria, 85
22780-280, Recreio, Rio de Janeiro, Brazil
TEL:(55)21-2437-8525 FAX:(55)21-2437-2338
<http://www.kyocerasolar.com.br>

● KYOCERA Solar Pty Ltd.

Level 3, 6-10 Talavera Road, North Ryde
N.S.W. 2113, Australia
TEL:(61)2-9870-3948 FAX:(61)2-9888-9568
<http://www.kyocerasolar.com.au/>

● KYOCERA Fineceramics GmbH

Fritz Muller strasse 107, D-73730 Esslingen, Germany
TEL:(49)711-9393417 FAX:(49)711-9393450
<http://www.kyocerasolar.de/>

● KYOCERA Asia Pacific Pte. Ltd.

298 Tiong Bahru Road, #13-03/05
Central Plaza, Singapore 168730
TEL:(65)6271-0500 FAX:(65)6271-0600

● KYOCERA Asia Pacific Ltd.

Room 803, Tower 1 South Seas Centre, 75 Mody Road,
Tsimshatsui East, Kowloon, Hong Kong
TEL:(852)2-7237183 FAX:(852)2-7244501

● KYOCERA Asia Pacific Ltd. Taipei Office

10 Fl., No.66, Nanking West Road, Taipei, Taiwan
TEL:(886)2-2555-3609 FAX:(886)2-2559-4131

● KYOCERA(Tianjin) Sales & Trading Corporation

Add:19F, Tower C HeQiao Building 8A GuangHua Rd.,
Chao Yang District, Beijing 100026, China
TEL:(86)10-6583-2270 FAX:(86)10-6583-2250